


ANTI-STATIC DRY CEMENT DELIVERY

300 PSI / 20 BAR

MADE IN ITALY

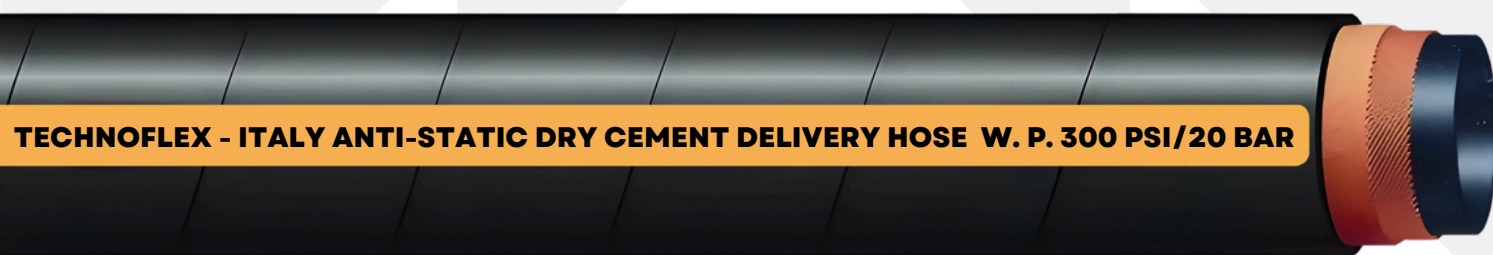

TECHNOFLEX - ITALY ANTI-STATIC DRY CEMENT DELIVERY HOSE W. P. 300 PSI/20 BAR

TechnoFlex Dry Cement Delivery Hose - 300 PSI / 20 BAR

Constructed with a highly durable tube and cover, utilizing top-grade elastomer compounds to ensure exceptional abrasion resistance and long-lasting performance. Engineered for the efficient transfer of dry materials and slurries, making it an ideal choice for handling dry cement, pebble, lime brine, barite, and other highly abrasive media in demanding industrial applications.

- **Temperature Range:**
 - -30°C to +80°C
- **Reinforcement:**
 - Multiple textile plies.
- **Tube:**
 - Black NR/SBR rubber blend.
- **Cover:**
 - Black NR/SBR rubber blend.
- **Standard Length:**
 - 20m / 60m
- **Safety Factor:**
 - 4:1

HOSE I.D.		Reinf. Plies	HOSE O.D.		Bend Radius		WORKING PRESSURE		BURST PRESSUER		WEIGHT Kg/m
in	mm		in	mm	in	mm	psi	bar	psi	bar	
2	50.8	2	2.882	73.2	12	300	300	20	1,200	80	2.24
2 ½	63.5	2	3.382	85.9	15	375	300	20	1,200	80	2.65
3	76.2	2	3.921	99.6	20	500	300	20	1,200	80	3.36
4	101.6	2	4.953	125.8	28	700	300	20	1,200	80	4.40
5	127.0	2	6.079	154.4	25	625	300	20	1,200	80	5.56
6	152.4	2	7.087	180.0	36	900	150	10	600	40	6.60
8	203.2	2	9.362	237.8	56	1,400	150	10	600	40	10.97
10	254.0	2	11.512	292.4	80	2,000	150	10	600	40	14.89
12	304.8	2	13.591	345.2	110	2,750	150	10	600	40	18.50

Authorized Distributor:
MOHAMMED AHMED AL-AWANI TRADING COMPANY

Dewatering Pump Sales | Dewatering Accessories | Hoses & Fittings | Pump Parts | Pump Rental | Pump Service

